
Characteristic features EN 1307

Name of article	FLOW x GLOW	Secondary backing ISO 2424	Action back
Method of production ISO 2424	Tufted	Electrostatic loading ISO 6356	<2 KV
Width ISO 3018	ca. 400	Surface resistivity ISO 10965 ROT	10º Ω
Surface structure ISO 2424	Loop	Transparency to heat ISO 8302	0,09 K*m² /W
Colourways	Mix	Light fastness ISO 105-B02	≥ 5
Pile material ISO 2424	100% Econyl by Aquafil	Water fastness EN ISO 105 E01	\geq 4
Primary backing ISO 2424	PET	Friction fastness EN ISO 105-X12	\geq 3-4
Overall weight ISO 8543	ca. 1740 g/m²	Stitch rate ISO 1763	ca. 99500/m²
Overall thickness ISO 1765	ca. 5.5 mm		
Pile service weight	ca. 680 g/m²		



Data status 10.06.2025. Subject to changes due to technical advancements.

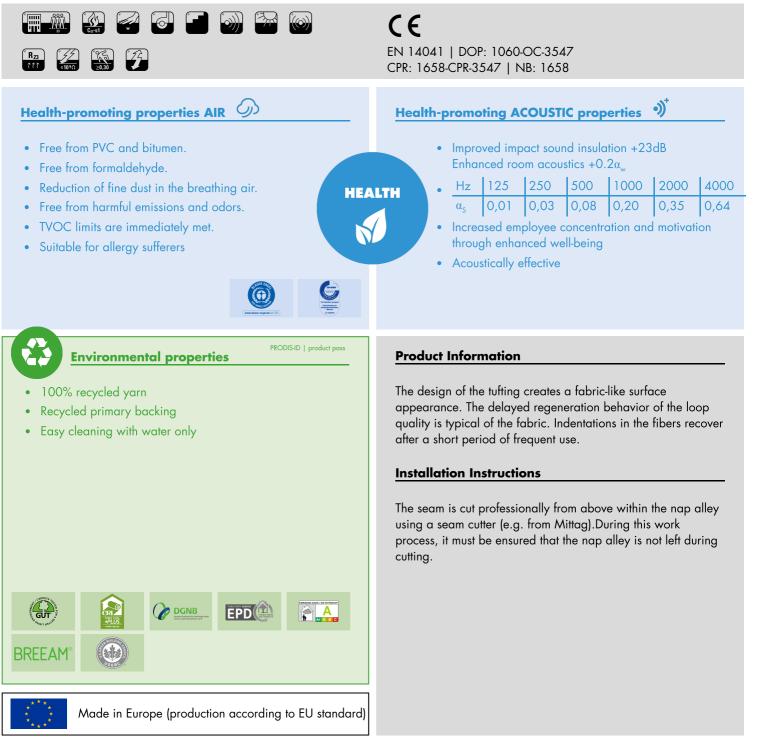

6